



AIR45



Electrify Your Air Compressor - No Noise, No Fumes, All The Power!

When you need Clean, Quiet, Power™ with no fumes or extensive heat build-up, the EPEQ® AIR45 is your proven compressor choice. EPEQ® Air Compressors are designed to be ultra-efficient when paired with the ELiMENT® Battery. The EPEQ® AIR45 Rotary Screw Compressor design provides air on demand with 30-45 CFM at 150 PSI, quiet operation, and all in a lightweight package. It is the perfect product for those using larger air tools and for people that use air for long periods of time. The AIR45 compressor communicates to the EPEQ® Smart Display and is designed to extend battery life and provide optimal performance.

EPEQ® AIR45 PERFORMANCE AND SPECIFICATIONS

- Clean, Quiet Power
- 30-45 CFM at up to 150 PSI Rotary Screw Air Compressor
- 100% Electric When Paired with the ELiMENT® Battery
- Lightweight 107 lb. Package
- Heavy-Duty Belt Drive System to Reduce Vibration and Provide Long Service Intervals
- Modular Design to Work with the Complete EPEQ® Ecosystem



800.526.8817 | EPEQ.com



EPEQAIR45_061224_NML

EPEQ® AIR45 Kit




(1) EPEQ® AIR45

- Motor: PMAC
- Compressor Type: Oil Flooded Rotary Screw
- Four Speed; 30 CFM, 35 CFM, 40 CFM, and 45 CFM
- 150 PSI Maximum
- Capacity: 200 Ah (Two ELiMENT® Batteries)
- Low Speed Run Time: 87.6 Minutes
- High Speed Run Time: 39 Minutes
- Size: 34.73" L x 15.68" W x 18.66" H
- Weight: 261 lbs.

(2) ELiMENT® BATTERIES

- Capacity: 100 Ah
- Voltage: 48
- Cycles: 5,000
- Material: Lithium Iron Phosphate
- Protections: Over-Current, Short-Circuit, Over-Charge, Over-Discharge, Over-Temperature and Under-Temperature
- EPEQ® Battery Management System
- Size: 13.38" L x 12.5" W x 11.8" H with Handles
- Weight: 107 lbs.

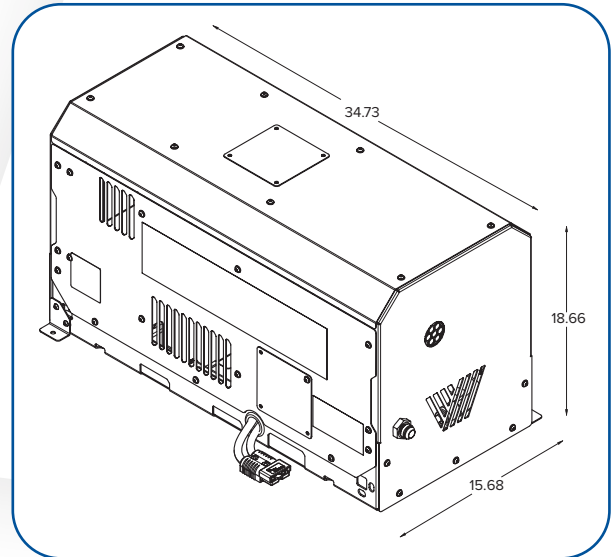

(1) EPEQ® SHORE POWER CHARGER

- 120VAC
- Size: 11" L x 4" W x 8" H
- Weight: 10 lbs.

(1) EPEQ® SMART DISPLAY

- LED Display with Anti-Glare Coating
- IP67 Rated
- Reads and Reports:
 - State of Charge
 - Charge / Discharge Rates and Cycles
 - Cell Voltage Levels
 - Battery Temperature
- Faults and Warnings:
 - Over-Charge and Over-Discharge
 - Over-Temperature and Under-Temperature



800.526.8817 | EPEQ.com